


The BCO26 Series are UL listed to UL2808 (XOBA) mini-precision current transformers. The current transformer is small size and low cost.

Electrical Specification

Model	Input Current	Available Output
BCO26-50	50A	Current Output @40mA, 50mA, 100mA Voltage Output @0.25V, 0.333V, 0.5V, 1V, 2V Output can be customize by customer
BCO26-60	60A	
BCO26-75	75A	
BCO26-100	100A	
BCO26-125	125A	
BCO26-150	150A	
BCO26-200	200A	
BCO26-250	250A	
BCO26-300	300A	
BCO26-400	400A	



Mechanical Dimension (mm)

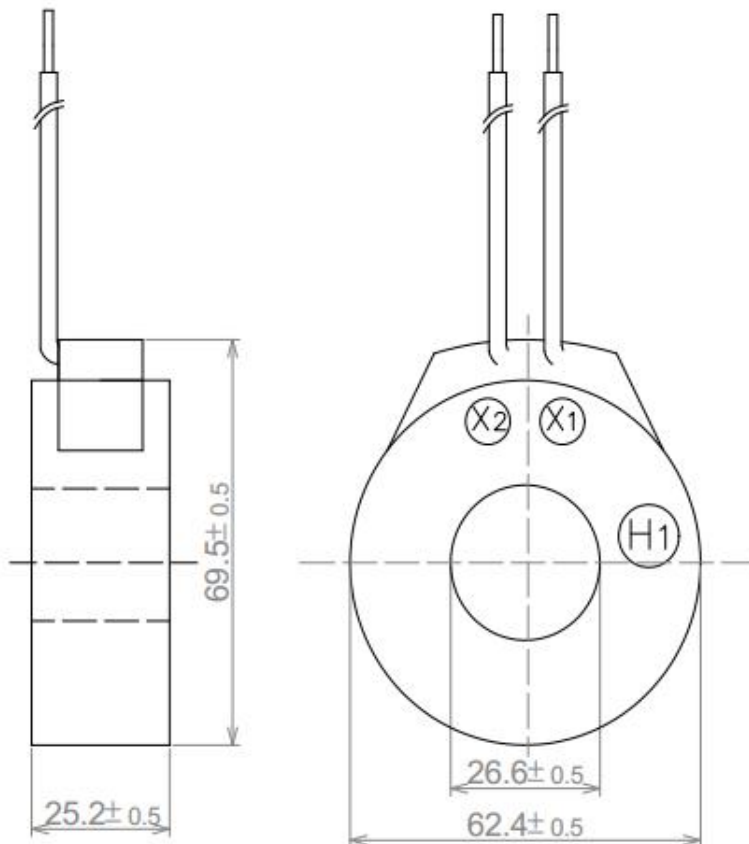

Application

- Energy and sub-metering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives

Feature

- 0.768" window opening
- Custom design Turns-Ratio available
- Rigid housing case with UL94V-0 durable plastic
- PVC wire leads: 16~18AWG
- Approximate weight 80g

Specification

- Standard Input Current 0.1-300A
- Frequency 50Hz/60Hz
- Standard accuracy 0.2,0.5,1
- Insulation Voltage 4000Vac/1min
- Operating Temp. -40 ° C to +65 ° C
- Storage Temp. -45 ° C to +85 ° C
- ANSI C57.13 and IEC61869-2 Standards

Caution: Before installation, safety precautions must be followed by licensed. Never energize primary unless short circuited terminals or burden connected to secondary.